


$$-17.375_{(10)} = 10001.011_{(2)}$$

1. KORAK RAZDVOJITI I PRETVORITI U BIN.

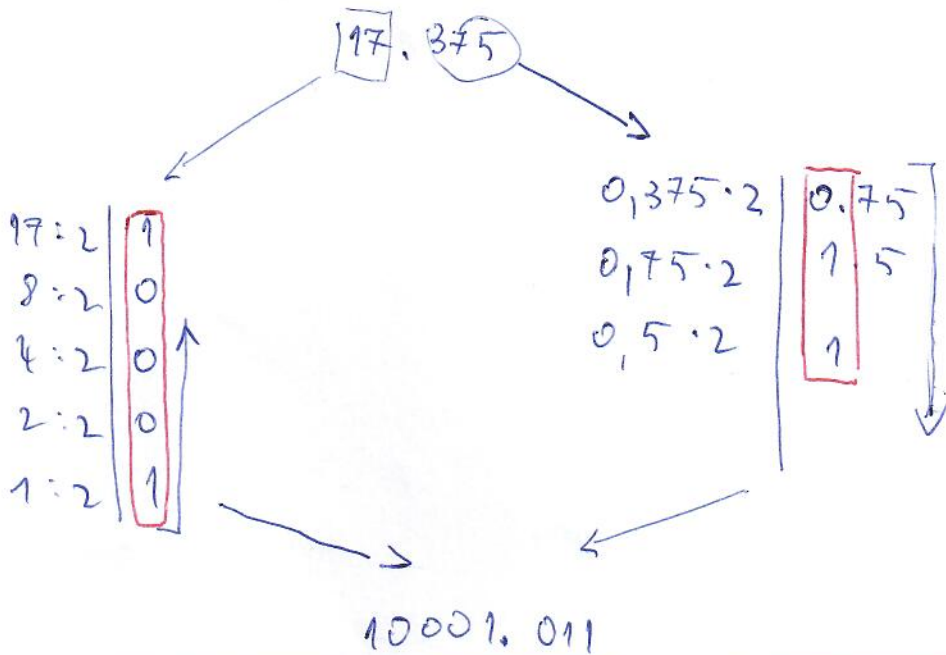


2. KORAK: POMICANJE DEC. TOČKE + RAČUNANJE EKSPONENTA

2a) $10001.011_{(2)} = 1.0001011_{(2)} \cdot 2^4$

2b) $127 + 4 = 131_{(10)} = 10000011_{(2)}$

3. KORAK SMJEŠTANJE U REGISTAR

- A = 10
- B = 11
- C = 12
- D = 13
- E = 14
- F = 15

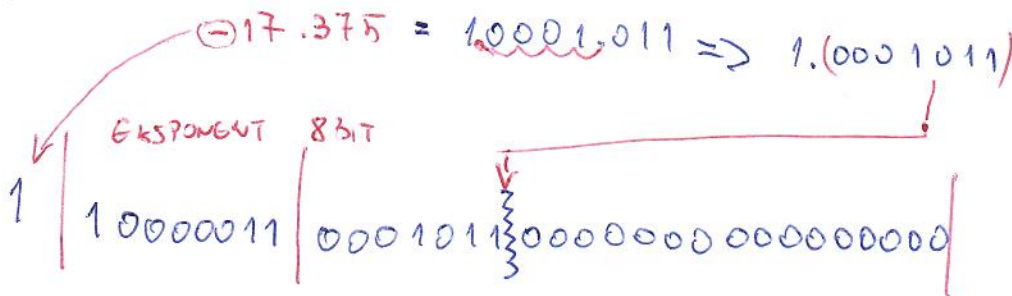

8421 (POZICIJSKA POTENCIJA)

